



COMPARE. YOU'LL TAKE TACO.

Boiler Feed Valves Reducing Valves and Dual Controls



- **Fast Fill Rate on All Models**
- **Exclusive Fast Fill Lever Lock**
- **Built In Check to Prevent Emptying System if Incoming Pressure Fails**
- **System Pressure Range 10 to 25 psi**
- **Union Connections with Tailpiece as Standard**
- **Pressure Setting Adjustment Separated from Fast Fill Lever for Easy, Fast Adjustment**

TACO, INC.


1160 Cranston Street, Cranston, RI 02920
Telephone (401) 942-8000 Telex: 92-7627

TACO (Canada) LTD.

1310 Aimco Blvd., Mississauga, Ontario L4W 1B2
Telephone (416) 625-2160 Telex: 06-961179


PRESSURE REDUCING VALVES — 329 AND 335

PURPOSE: To automatically feed water to a hot water heating system whenever pressure in the system drops below the pressure setting of the valve.

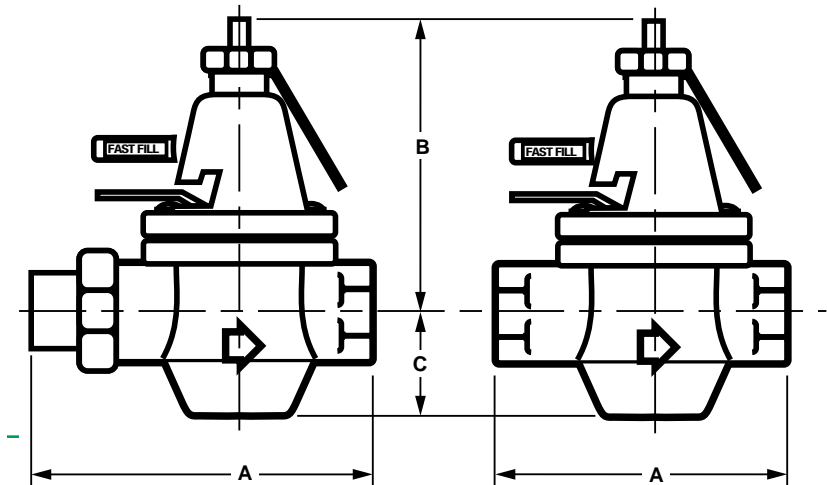

Product No.	Construction Material	Size & Type Connection	Maximum Supply Side Pressure	Maximum Temperature	Dimensions, Inches			Shipping Wt. Lbs.	
					A	B	C	Ea.	Ctn.
329	Cast Iron	1/2" (15mm) NPT & Sweat	200 psi (1380 KPA)	212°F (100°C)	4 1/4 (108mm)	3 3/4 (95mm)	1 3/8 (35mm)	2.4 (1.1kg)	30 (14kg)
329T	Cast Iron	1/2" (15mm) NPT			4 3/8 (111mm)	3 3/4 (95mm)	1 3/8 (35mm)		
335	Bronze	3/4" (20mm) NPT			3 3/4 (95mm)	3 3/4 (95mm)	1 3/8 (35mm)		

DUAL CONTROL — 334 AND 334T

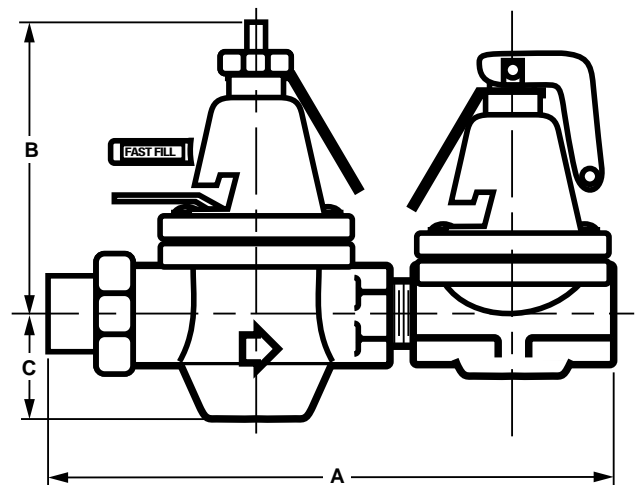

Product No.	Construction Material	Size & Type Connection	Max. Temp.	System Side		Dimensions, Inches			Shipping Wt. Lb.	
				Max. Operating Pressure Relief Valve	PRV Valve	A	B	C	Ea.	Ctn. 6
334	Cast Iron	1/2" (15mm) NPT & Sweat	212°F (100°C)	30 PSIG (207 KPA)	30 PSIG (207 KPA)	7 1/4 (184mm)	3 3/4 (95mm)	1 3/8 (35mm)	3.9 (1.8 kg)	24 (11 kg)
334T		1/2" (15mm) NPT				7 3/8 (187mm)	3 3/4 (95mm)	1 3/8 (35mm)		